


Data Sheet


Recommended Application: Universal

RAYOVAC Maximum Plus

4022

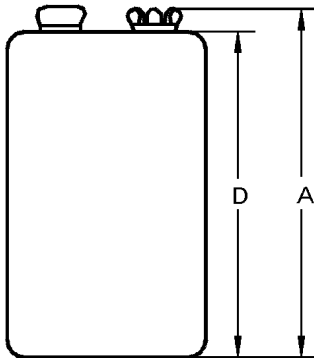

Type Designation	4022
Designation IEC System	6LR61 Zn-MnO ₂ (Alkaline)
Shelf Life (Coding)*	5 years
Nominal Voltage [V]	9
Typical Capacity C [mAh]	530 (discharge with high-resistance)
Permissible Temperature Range	- 10 °C ... 50 °C
Weight, approx. [g]	46
Volume [ccm]	20.8



Dimensions [mm]

	min:	max:
A	46.5	48.5
D	-	46.4
E	12.45	12.95
O	24.5	26.5
P	15.5	17.5

Typical Capacities (at 20°C)

Discharge Type	Load	End Voltage[V]	7.8	7.5
24H/D,7D/H – 1S/1H,24H/1D	10000Ω - 620Ω	Time [h]	281	419
		Capacity [mAh]	240	348
		Energy [mWh]	2026	2887
Smoke Detector				
Discharge Type	Load	End Voltage[V]	6.0	5.4
1H/D,7D/W	270 Ω	Time [h]	17,33	19,82
		Capacity [mAh]	472	526
		Energy [mWh]	3500	3808
Toy				
Discharge Type	Load	End Voltage[V]	6.0	5.4
2H/D,7D/W	620 Ω	Time [h]	41,85	44,46
		Capacity [mAh]	507	532
		Energy [mWh]	3854	3996
Radio				

No publication or circulation of data to third parties without consent of VARTA Consumer Batteries

* In consideration of typical loss of capacity at storage and application.